


### Mini Cable Lockout:

Model	Description	Material
030.124	Cable diameter 1.5mm, length 300mm	Nylon PA

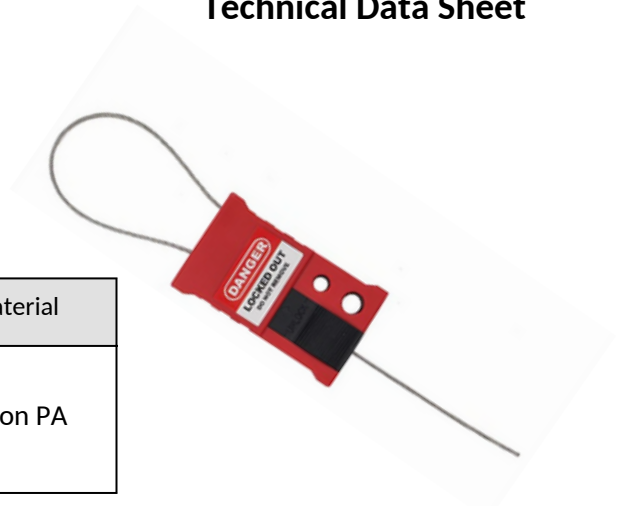

Material				
<ul style="list-style-type: none"> <li>Lock body: made from nylon, with an insulation plastic coated steel cable.</li> </ul>				
Features	Chemical	°C	Chemical	°C
<ul style="list-style-type: none"> <li>Used to lock the device with a small lock hole.</li> <li>Accepts up to 2 padlocks for multiple lockout applications. The lock hold diameter is 8mm and 6mm.</li> </ul>	Acetone	25	Petroleum	25
	Acetone	60	Turpentine oil	25
	Chlorine, chlorine water	25	Turpentine substitute (white spirit)	25
	Fuel, engine: Gasoline (normal & premium grade)	85	Trichloroethane 1,1,1	45
	Lubrication oil: gear oil	< 120	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120
	Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25
	Methanol	25	Water (including seawater), chlorinated (<0.5mg/l)	80
Temperature Range	Dimensions			
<ul style="list-style-type: none"> <li>Temperature range frome : - 20° to 120°C (0° to 250°)</li> </ul>	Cable diameter 1.5mm, length 300mm			
Chemical Resistance				
All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only.				

**NOTE:** Please note that the values presented in this document are averages and are not intended to be used for specification purposes. The test data and results contained herein are provided for general information only and should not be relied upon by our customers for designing and specifying products or meeting specific performance criteria. We encourage customers who wish to establish specifications or performance criteria for particular product applications to contact us for further information and assistance.