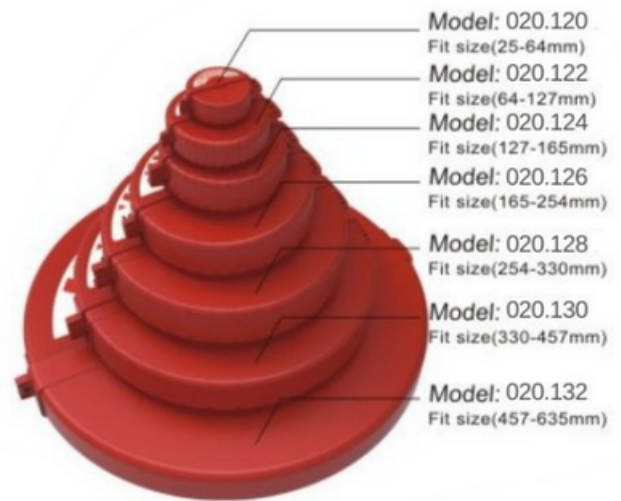

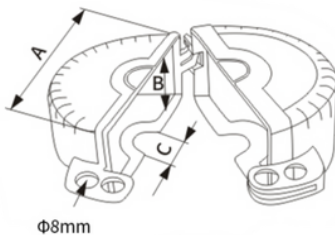


Standard Gate Valve Lockout:

Model	Description	Material
020.120	1" - 2.5" (25mm-64mm)	Plastic ABS
020.122	2.5"-5" (64mm-127mm)	
020.124	5"-6.5" (127mm-165mm)	
020.126	6.5"-10" (165mm-254mm)	
020.128	10"-13" (254mm-330mm)	
020.130	13"-18" (330mm-457mm)	
020.132	18"-25" (457mm-635mm)	



Material																																				
<ul style="list-style-type: none">Made from durable ABS																																				
Features	Chemical	°C	Chemical	°C																																
<ul style="list-style-type: none">Once locked, it covers around the hand wheel and prevent the valve wheel from being turned.Two parts design can be combined into one when storing and carrying which reduce the half restore space.Accept up to 2 padlocks, locking shackle max diameter 8mm.	Acetone	25	Petroleum	25																																
	Acetone	60	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120																																
	Fuel, engine: Gasoline (normal & premium grade)	85																																		
	Lubrication oil: gear oil	< 120	Water (including seawater)	25																																
	Methanol	25	Water (including seawater), chlorinated (<0.5mg/l)	80																																
Temperature Range	Dimensions																																			
<ul style="list-style-type: none">Temprature range from -20°C to +90°C																																				
Chemical Resistance																																				
All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only.	<table><tr><th>Part No.</th><th>A</th><th>B</th><th>C</th></tr><tr><td>020.120</td><td>83</td><td>28</td><td>19</td></tr><tr><td>020.122</td><td>136</td><td>38</td><td>39</td></tr><tr><td>020.124</td><td>170</td><td>50</td><td>85</td></tr><tr><td>020.126</td><td>260</td><td>59</td><td>85</td></tr><tr><td>020.128</td><td>360</td><td>76</td><td>99</td></tr><tr><td>020.130</td><td>460</td><td>78</td><td>95</td></tr><tr><td>020.132</td><td>655</td><td>63</td><td>135</td></tr></table>				Part No.	A	B	C	020.120	83	28	19	020.122	136	38	39	020.124	170	50	85	020.126	260	59	85	020.128	360	76	99	020.130	460	78	95	020.132	655	63	135
	Part No.	A	B	C																																
	020.120	83	28	19																																
	020.122	136	38	39																																
	020.124	170	50	85																																
	020.126	260	59	85																																
	020.128	360	76	99																																
	020.130	460	78	95																																
020.132	655	63	135																																	

NOTE: Please note that the values presented in this document are averages and are not intended to be used for specification purposes. The test data and results contained herein are provided for general information only and should not be relied upon by our customers for designing and specifying products or meeting specific performance criteria. We encourage customers who wish to establish specifications or performance criteria for particular product applications to contact us for further information and assistance.