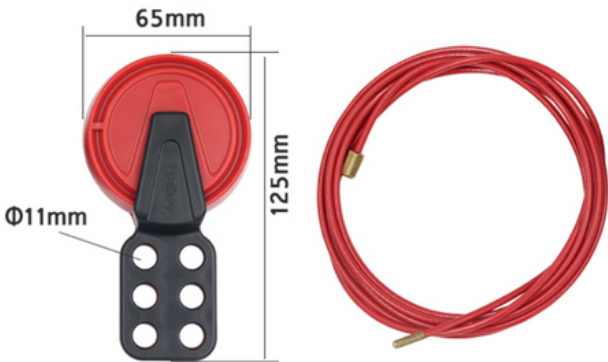


Adjustable Cable Lockout

Model	Description
030.119	Cable Lockout 4.3mm 2.4m for Secure Multi-Point Lockout Applications

Dimensions	Image
<ul style="list-style-type: none"><li>Body Size: 125 mm (H) x 65 mm (W)</li><li>Cable: 4.3 mm (Diameter) x 2.4 m (Length)</li><li>Locking Holes: Ø11 mm</li></ul>	

Material	Features
<ul style="list-style-type: none"><li>Made from ABS body with non-conductive nylon cable attachment</li></ul>	<ul style="list-style-type: none"><li>Lightweight construction for easy handling, carrying, and operation</li><li>Equipping your employees with proper lockout tools and warning devices can save lives, reduce lost employee time, and cut insurance costs</li><li>The universal cable locks provide a simple way to lock out multiple energy isolation points</li><li>Color: Red and Black for high visibility and identification</li></ul>

Temperature Range	Chemical Resistance
Plastic Housings: -20°C to 120°C (0°F to 250°F)	All approved chemicals listed are based on the manufacturer's specified chemical resistance chart for plastic material only.

