
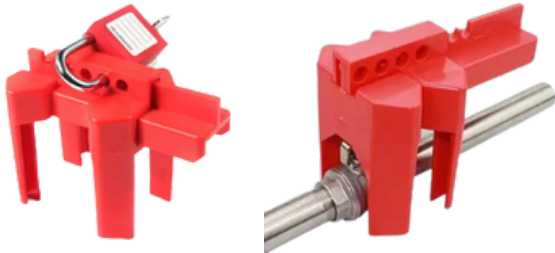


Adjustable Ball Valve Lockout

Modèle	Description	Matériau
020.140	Cadenas pour vanne à boisseau, compatible avec les vannes de 1/4 pouce à 2 pouces	Plastique ABS

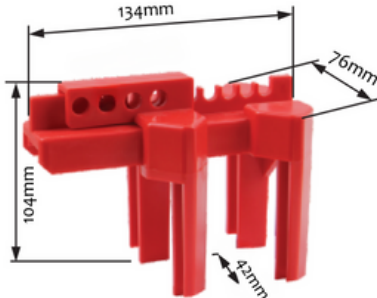

Matériau				
<ul style="list-style-type: none">Fabriqué en ABS résistant, hautement anti-fissures et anti-abrasion, et supporte des conditions climatiques extrêmes (températures élevées ou basses).				
Features	Chemical	°C	Chemical	°C
<ul style="list-style-type: none">The two halves of the lockout encompass the ball valve handle to secure it from inadvertent activation.Designed to be used with padlocks having a maximum shackle diameter of 8mm.Suitable for 1/2 inch (13mm) to 2 inch (51mm) valves in both OPEN and CLOSED positions.Recommended for use with yetolock steel shackle safety padlocks.	Acetone	25	Petroleum	25
	Acetone	60	Turpentine oil	25
	Chlorine, chlorine water	25	Turpentine substitute (white spirit)	25
	Fuel, engine: Gasoline (normal & premium grade)	85	Trichloroethane 1,1,1	45
	Lubrication oil: gear oil	< 120	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120
	Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25
	Methanol	25	Water (including seawater), chlorinated (<0.5mg/l)	80
Temperature Range	Dimensions			
<ul style="list-style-type: none">Temprature range from -20°C to +90°C				
Chemical Resistance				
All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only.				

NOTE: Please note that the values presented in this document are averages and are not intended to be used for specification purposes. The test data and results contained herein are provided for general information only and should not be relied upon by our customers for designing and specifying products or meeting specific performance criteria. We encourage customers who wish to establish specifications or performance criteria for particular product applications to contact us for further information and assistance.