
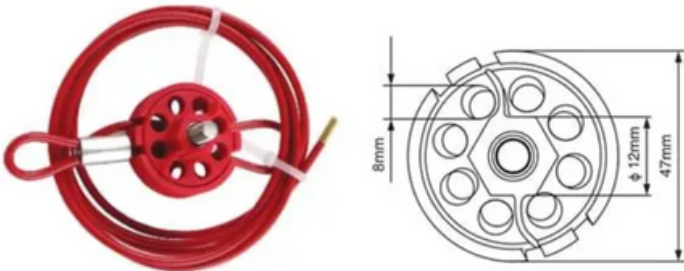




Model	Description	Material
030.116	Cable diameter 3.8mm, length 2m	Nylon PA

Material				
<ul style="list-style-type: none">Lock body: made from industrial durable nylon, and insulation coated steel cable.				
Features	Chemical	°C	Chemical	°C
<ul style="list-style-type: none">Designed to effectively lock out a variety of isolation points, including gate valves, “T” valve handles, electrical disconnects, and much more.The handle is designed to operate the device without any tools needed.Accepts up to 8 padlocks for multiple lockout applications.These economical and compact devices are highly visible and will quickly become a staple lockout device in any facility	Acetone	25	Petroleum	25
	Acetone	60	Turpentine oil	25
	Chlorine, chlorine water	25	Turpentine substitute (white spirit)	25
	Fuel, engine: Gasoline (normal & premium grade)	85	Trichloroethane 1,1,1	45
	Lubrication oil: gear oil	< 120	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120
	Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25
	Methanol	25	Water (including seawater), chlorinated (<0.5mg/l)	80
Temperature Range	Dimensions			
<ul style="list-style-type: none">Temprature range from -20°C to +120°C				
Chemical Resistance				
All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only.				

NOTE: Please note that the values presented in this document are averages and are not intended to be used for specification purposes. The test data and results contained herein are provided for general information only and should not be relied upon by our customers for designing and specifying products or meeting specific performance criteria. We encourage customers who wish to establish specifications or performance criteria for particular product applications to contact us for further information and assistance.