
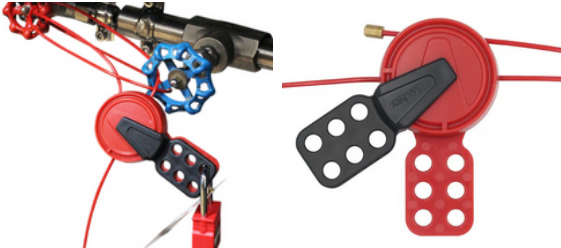


Adjustable Cable Lockout:

| Model   | Description                       | Material |
|---------|-----------------------------------|----------|
| 030.119 | Cable diameter 4.3mm, length 2.4m | ABS body |

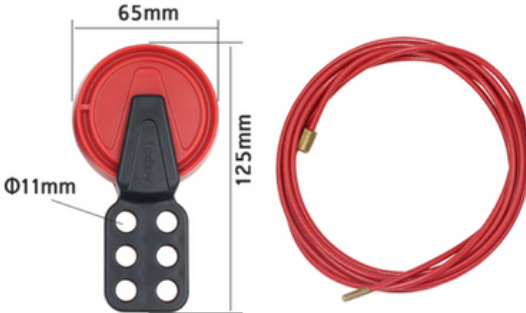

| Material  |   |       |   |       |
|---|--|-------|---|-------|
| <ul style="list-style-type: none"><li>Made of ABS body withstand chemicals and non-conductive nylon cable attachment.</li></ul>   |  |       |   |       |
| Features  | Chemical   | °C    | Chemical  | °C    |
| <ul style="list-style-type: none"><li>Lightweight construction for easy handing, carrying and operation.</li><li>Equipping your employees with the proper lockout tools and warning devices can save lives, reduce lost employee time, and cut insurance costs</li><li>The universal cable locks provide a simple way to lock out multiple energy isolation points.</li></ul> | Acetone  | 25    | Petroleum   | 25    |
|   | Acetone  | 60    | Turpentine oil  | 25    |
|   | Chlorine, chlorine water   | 25    | Turpentine substitute (white spirit)                              | 25    |
|   | Fuel, engine: Gasoline   | 85    | Trichloroethane 1,1,1   | 45    |
|   | Lubrication oil: gear oil  | < 120 | Lubricating oil: HD engine oils, hydraulic oils, transformer oils | < 120 |
|   | Methanol   | 25    | Water (including seawater)  | 25    |
| Temperature Range   | Dimensions   |       |   |       |
| <ul style="list-style-type: none"><li>Plastic Housings: - 20° to 120°C (0° to 250°F)</li></ul>  | Cable diameter 4.3mm, length 2.4m  |       |   |       |
| Chemical Resistance   |  |       |   |       |
| All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only. All other materials in the device are made of Stainless steel.   |  |       |   |       |