
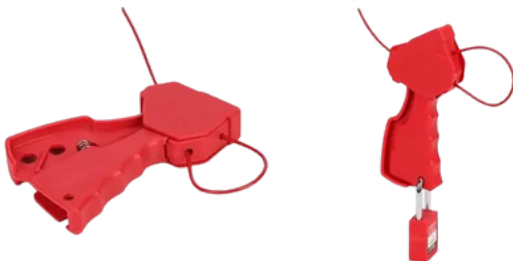


Adjustable Cable Wire Lockout:

Model	Description	Material
030.110	Cable diameter 3.3mm, length 2.4m	Nylon ABS

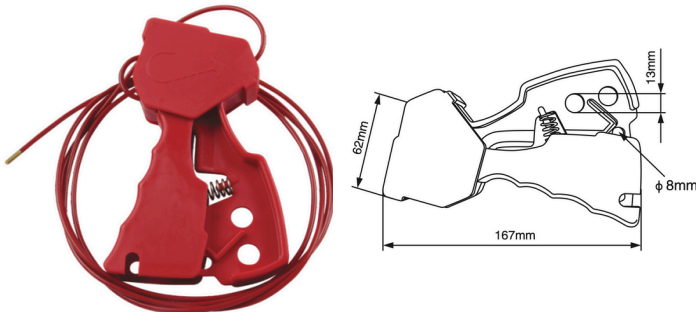

Design				
<ul style="list-style-type: none">Made of impact modified nyloncomes with a 6 ft [1.8m] galvanized steel cable				
Material	Chemical	°C	Chemical	°C
<ul style="list-style-type: none">Lock body made from glass-filled nylon, withstands chemicalsCable: tough, flexible multi-stranded steel cable, with clear plastic insulation coating.	Acetone	25	Petroleum	25
	Acetone	60	Turpentine oil	25
	Chlorine, chlorine water	25	Turpentine substitute (white spirit)	25
	Fuel, engine: Gasoline (normal & premium grade)	85	Trichloroethane 1,1,1	45
	Lubrication oil: gear oil	< 120	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120
Temperature Range				
<ul style="list-style-type: none">Glass-filled nylon: -20° to 120°C (0° to 250°F)	Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25
	Methanol	25	Water (including seawater), chlorinated (<0.5mg/l)	80
Features	Dimensions			
<ul style="list-style-type: none">Accepts 1 padlock to lock out.Can be equipped together with hasps for multiple lockout usage.easy-to-use multi-purpose energy isolation solution, ideal for unusual devices that can't be locked out using traditional devices.	<p>Cable diameter 3.3mm, length 2.4m</p> 			
Chemical Resistance				
All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only.				