
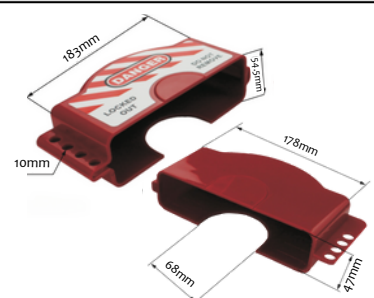


### Adjustable Gate Valve Lockout:

Model	Description	Material
020.200	Suitable for valve handle 1" to 6 1/2" in diameter	Plastic ABS



Material				
<ul style="list-style-type: none"><li>Made from durable ABS, highly resistant to cracking and abrasion and supports extreme weather temperature conditions.</li></ul>				
Features	Chemical	°C	Chemical	°C
<ul style="list-style-type: none"><li>The size is adjustable, fits valve handle from 1 in to 6 1/2 in in diameter.</li><li>Can be equipped together with padlocks. Padlock locking shackle max diameter 3/8" (10mm).</li><li>Easy usage: can be covered and rotated freely around valve wheel to lock out the valve handle.</li><li>Color: stock in red. Yellow, green, blue also available.</li></ul>	Acetone	25	Petroleum	25
	Acetone	60	Turpentine oil	25
	Chlorine, chlorine water	25	Turpentine substitute (white spirit)	25
	Fuel, engine: Gasoline (normal & premium grade)	85	Trichloroethane 1,1,1	45
	Lubrication oil: gear oil	< 120	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120
	Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25
	Methanol	25	Water (including seawater), chlorinated (<0.5mg/l)	80
Temperature Range	Dimensions			
<ul style="list-style-type: none"><li>Temprature range from -20°C to +90°C</li></ul>				
Chemical Resistance				
All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only.				

**NOTE:** Please note that the values presented in this document are averages and are not intended to be used for specification purposes. The test data and results contained herein are provided for general information only and should not be relied upon by our customers for designing and specifying products or meeting specific performance criteria. We encourage customers who wish to establish specifications or performance criteria for particular product applications to contact us for further information and assistance.