
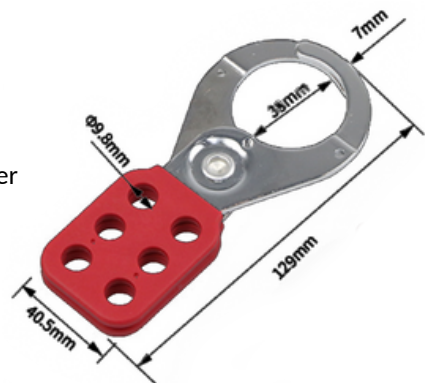


### Steel Group Lockout Hasps:

Model	Description	Material
040.104	1.5"(38mm) diameter hook for 6 padlocks (no hook)	Nylon PA + Steel



Material				
<ul style="list-style-type: none"><li>Handle made from PA</li><li>lock shackle made from nickel-plated steel with red plastic or vinyl coated body, rust proof.</li></ul>				
Features	Chemical	°C	Chemical	°C
<ul style="list-style-type: none"><li>Allow multiple padlocks to be used when isolating one energy source.</li><li>Constructed of vinyl-coated high tensile steel with rust resistant plating</li><li>Available in 1"(25mm) and 1.5"(38mm) diameter jaws</li><li>Accept up to 6 padlocks.</li></ul>	Acetone	25	Petroleum	25
	Acetone	60	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120
	Lubrication oil: gear oil	< 120		
	Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25
	Methanol	25	Water (including seawater), chlorinated (<0.5mg/l)	80
size	Dimensions			
<ul style="list-style-type: none"><li>Steel: -30°F to 350°F (-35°C to 177°C)</li><li>Vinyl Coating: -30°F to 200°F (-35°C to 95°C)</li></ul>	 <ul style="list-style-type: none"><li>Lock holes: 9.8mm diameter</li><li>Jaw size: 1.5"(38mm)</li></ul>			
Chemical Resistance				
All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only.				