



Steel Shackle Safety Padlock (25mm)

Model	Description	Lock Shackle material	Specification
010.200.01	Keyed Differ	Steel	“KA”: Each padlock is keyed the same in one group “P”: Straight edge plastic lock body “S”: Steel shackle Other material can be customized: “SS”: Stainless steel shackle “BS”: Brass shackle
010.200.02	Keyed Alike		
010.200.03	Keyed Difer & Master Key		
010.200.04	Keyed Alike & Master Key		
010.200.04	Grand Master Key		

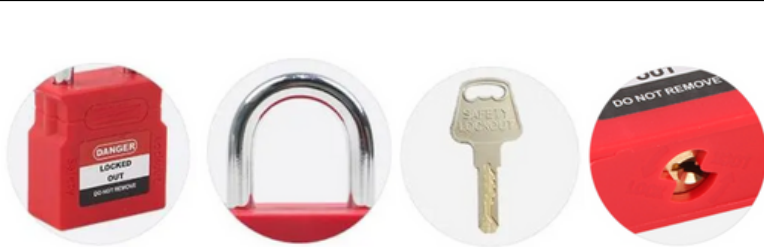

Material				
<ul style="list-style-type: none">The body is made of reinforced nylon PA66Shackle made of steel, highly resist of extreme weather and it's non-conductive.				
Features	Chemical	°C	Chemical	°C
<ul style="list-style-type: none">Shackle made of steel, highly resist of extreme weather and it's non-conductive.Each padlock has unique key numbering on body and key, if it's required.11 Colors as regular stocks: Red, yellow, green, orange, purple, black, white, brown, grey, blue, dark blue, etc.	Acetone	15-60	Nickel salt solns. (chloride, sulfate)	15-30
	Ammonia soln.	15-30	Petroleum	15-30
	Ammonia soln.	48	Silicone oils	<80
	Fuel, engine: Gasoline (Leaded & Unleaded)	48	Toluene	15-30
	Fuel, Diesel	85	Water (including seawater)	15-30
	Heptane	15-30	Water (including seawater) chlorinated (<0.5mg/l)	80
	Lubrication oil: gear oil	<130	Zinc chloride	15-30
	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	<130		
Temperature Range	Dimensions			
<ul style="list-style-type: none">Nylon body withstand temperature from -20°C to +80°C	<ul style="list-style-type: none">Body size: Body size: 41*45*20mmShackle clearance: 25mmShackle diameter: 6mm 			
Chemical Resistance				
All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only.				