


### Universal Valve Lockout and Fixing Unit

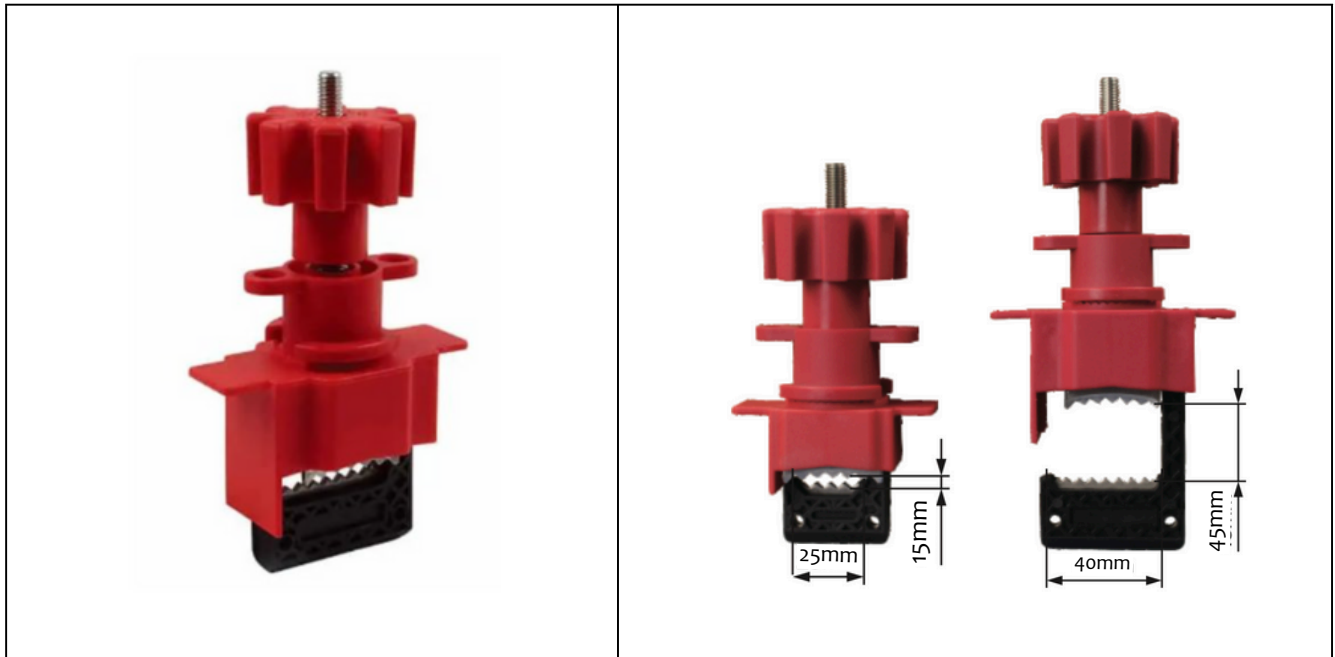

Model	Description	Material
020.265	Valve Lockout Device	Industrial grade steel and nylon
020.268	Valve Fixing Unit	Industrial grade steel and nylon

Dimensions	Features
<ul style="list-style-type: none"> <li>• <b>020.265:</b> <ul style="list-style-type: none"> <li>◦ Width: 25mm</li> <li>◦ Max Clamping Width: 15mm</li> </ul> </li> <li>• <b>020.268:</b> <ul style="list-style-type: none"> <li>◦ Width: 40mm</li> <li>◦ Max Clamping Width: 45mm</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• Enables locking out and securing valves of different types and sizes, with a compact design for precise clamping</li> <li>• No other device offers such flexibility and security</li> <li>• Designed to handle extra impact and resist chemicals, making them ideal for just about any environment</li> <li>• Color: Red for high visibility</li> </ul>
Temperature Range	Material
<ul style="list-style-type: none"> <li>• Temperature range from -20°C to +120°C</li> </ul>	<ul style="list-style-type: none"> <li>• Made from industrial grade Steel And Nylon, Rugged easy to use and lightweight.</li> </ul>

NOTE: Please note that the values presented in this document are averages and are not intended to be used for specification purposes. The test data and results contained herein are provided for general information only and should not be relied upon by our customers for designing and specifying products or meeting specific performance criteria. We encourage customers who wish to establish specifications or performance criteria for particular product applications to contact us for further information and assistance.